

The B3 Series offers a wide variety of auto and manual reset safety cut-outs for both over temperature and over current protection. Designed with long life, performance and ease of handling in mind, the robust insert moulded construction and full range of cover options provide the ideal choice when a heavy duty protector is specified.

The B3 Series can be used as a low voltage DC circuit breaker in addition to it's normal use as a 16 Amp mains voltage safety cut-out.

## TECHNICAL DATA

### AUTO RESET

AC Rating BEAB: 16 Amps at 250 Volts 50Hz for 10 000 cycles

DC Rating BEAB: 13 Amps at 24 Volts for 10 000 cycles

### MANUAL RESET


AC Rating BEAB: 16 Amps at 250 Volts 50Hz for 300 cycles

Max. Continuous Carry Current: 16 Amps AC

Temperature Range: Min 50°C to max 155°C

Max. Ambient Temperature: 50°C above set temperature or 200°C max

Tolerance: From  $\pm 5^\circ\text{C}$

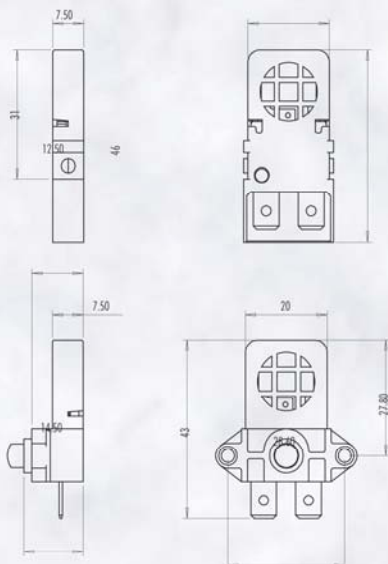

## FEATURES

- 16 Amp rating
- 6.3mm tab terminals
- Auto & manual reset versions
- Competitive price
- Excellent response times
- Large range of cover options
- Robust construction
- Wide performance range

## APPLICATIONS

- Automotive wiring harnesses
- Battery chargers
- Domestic ovens
- DC electric motors
- Garden care equipment
- Heaters - fan, convector, panel heaters etc
- Home laundry appliances
- Transformers

## APPROVALS

Approved to EN 60730-1 & EN 60730-2-9

Also Approved by CSA, UL

For detailed drawings, specific approvals data, samples and application test work please contact our Sales Office.

'Easifix', 'Otter' and the Otter logo are registered trademarks of Otter Controls Limited.

The product(s) described here are subject to patents or patent applications worldwide.

OTTER CONTROLS LIMITED

Tongue Lane Industrial Estate, Dew Pond Lane,  
Buxton, Derbyshire, SK17 7LF, England

Tel: + 44 (0) 1298 762300 Fax +44 (0) 1298 72664

Email: sales@ottercontrols.com

WEB: www.ottercontrols.com

Approved to BS EN ISO 9001: 2008

**Otter**<sup>®</sup>

...always in control